



The Ocular F camera was designed as a cost effective solution to observe permanent positions where a PTZ unit is not required. Manufactured from 316 stainless steel the unit is compact corrosion resistant and lightweight.

Compact

At only 100mm x 230mm the unit is extremely compact

Lightweight

At less than 5 kilos the unit is a market leader

Low ambient operation

Operates at down to 0.4 lux in monochrome and 1.5 lux in colour

Low maintenance

Simple design and robust construction means the OcularF requires little maintenance


Easy installation

The lightweight unit with its detachable bracket ensures easy installation

Software integration

The Ocular F can be installed together with the Ocular 12EX and most other systems




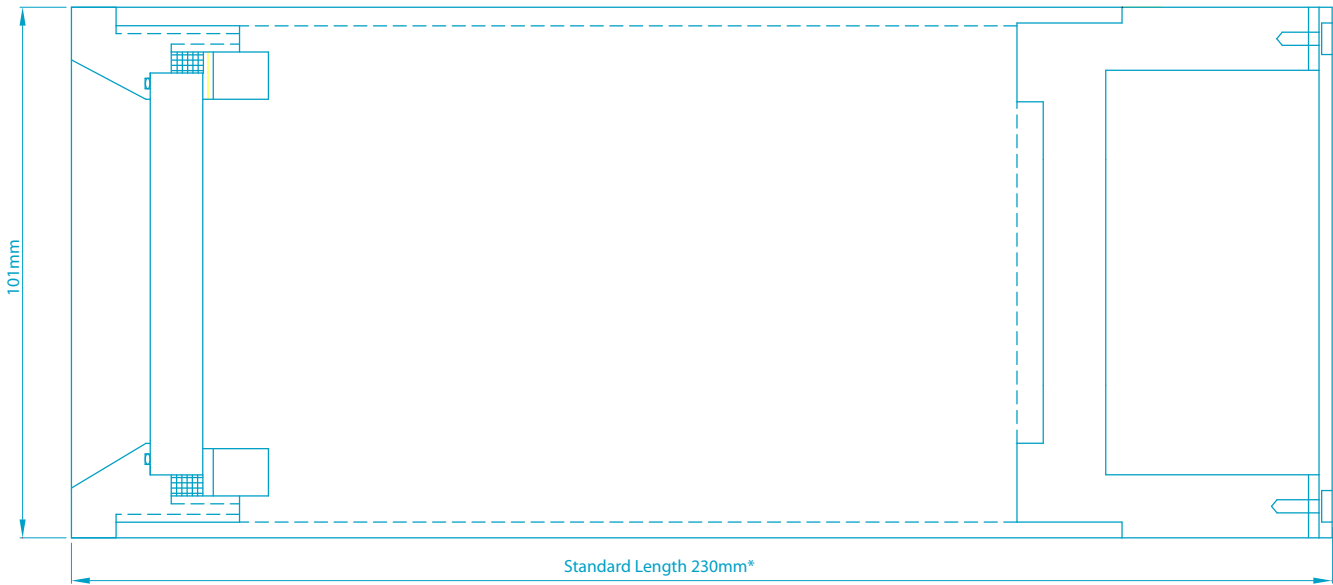

Mounting Bracket fitted as standard

* Shorter versions available on request

Feb 03

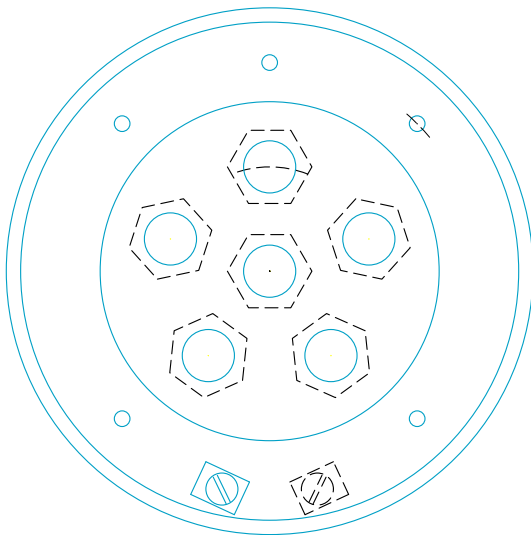

Terminal Chamber



**Wellhead Electrical
Supplies**

Unit 4D, Dyce Industrial Park, Wellheads Crescent, Dyce
Aberdeen AB21 7GA, Scotland
Tel: +44 (0)1224 723606 Fax: +44 (0)1224 723583
sales@wellheads.co.uk

CAMERA SPECIFICATIONS

Power Requirements	85-26VAC 50 – 60Hz	
	Colour	Mono
Scanning System	PAL/CCIR	PAL
Line Resolution	380	460
Lens Size	4-9mm Direct Drive Varifocal	
Iris	Auto	
Video Output	1 V p-p	
Min Illumination	3 Lux	0.4 Lux
Sync System	Internal	
Operating Temperature	-20°C to +60°C	

HOUSING SPECIFICATIONS

Certification	NEMKO 00ATEX 375U EExde IIC T6	
IP Rating	66/67	
Manufactured Form	316L Stainless Steel	
Size	101mm x 230mm	
Weight	5 Kilo approx.	
Entries	3 x 20mm or 3 x 25mm	