


HWC2000SA-MKII-xxx

Illuminated windsock

Designed with an internal floodlight to illuminate the windsock and prevent glare. The illuminated windsock provides wind-speed and direction indication to pilots during landing and take-off.

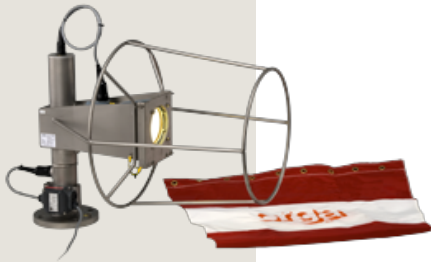

Key features

- Reliable wind direction and wind-speed indication for helicopter operations
- Low cost of ownership
- Low power consumption
- No dazzling of pilot because of internal sock illumination
- No corrosion stainless steel 316 body
- Easy to install
- Various operating voltages
- Aeronautical obstruction light (L75SA-R-AC-32) can be mounted on the top if required

Standards/Certification

- Complies with CAA-UK CAP 437; Offshore helicopter landing areas – Guidance on standards, Dec. 2008, chapter 4, paragraph 1.5 – Illuminated windsock
- Complies with ICAO Annex 14, Volume II; International standards and recommended practices: Aerodromes, chapter 5.1.1 – Wind direction indicators for elevated Heliports & Helidecks

Performance characteristics

- Sock colour; red/white/red/white/red or orange
- Sock length: 1,200mm

Electrical characteristics

- Operating voltage: see table
- Power consumption: see table
- Connection details: max. 4mm²; one GRP M20x1.5 cable gland and one GRP M20x1.5 blind plug
- Earth connection: internal max. 4mm² and external M8

Physical characteristics

- Dimensions (L x W x H): 693 x 460 x 499mm (excl. sock)
- Weight: 22kg
- Degree of protection: IP66
- Operating temperature range: -20°C to +40°C

Type designation	Power consumption (W)	Frequency (Hz)	Voltage (Vac)
HWC2000SA-MKII-230	15W	50/60Hz	230Vac
HWC2000SA-MKII-120	15W	50/60Hz	120Vac

HWC2000SA-MKII-xxx

Illuminated windsock

